


**CREAMER**  
**METAL PRODUCTS**

*Your Start to Finish Provider of  
Material Handling Solutions since 1946*

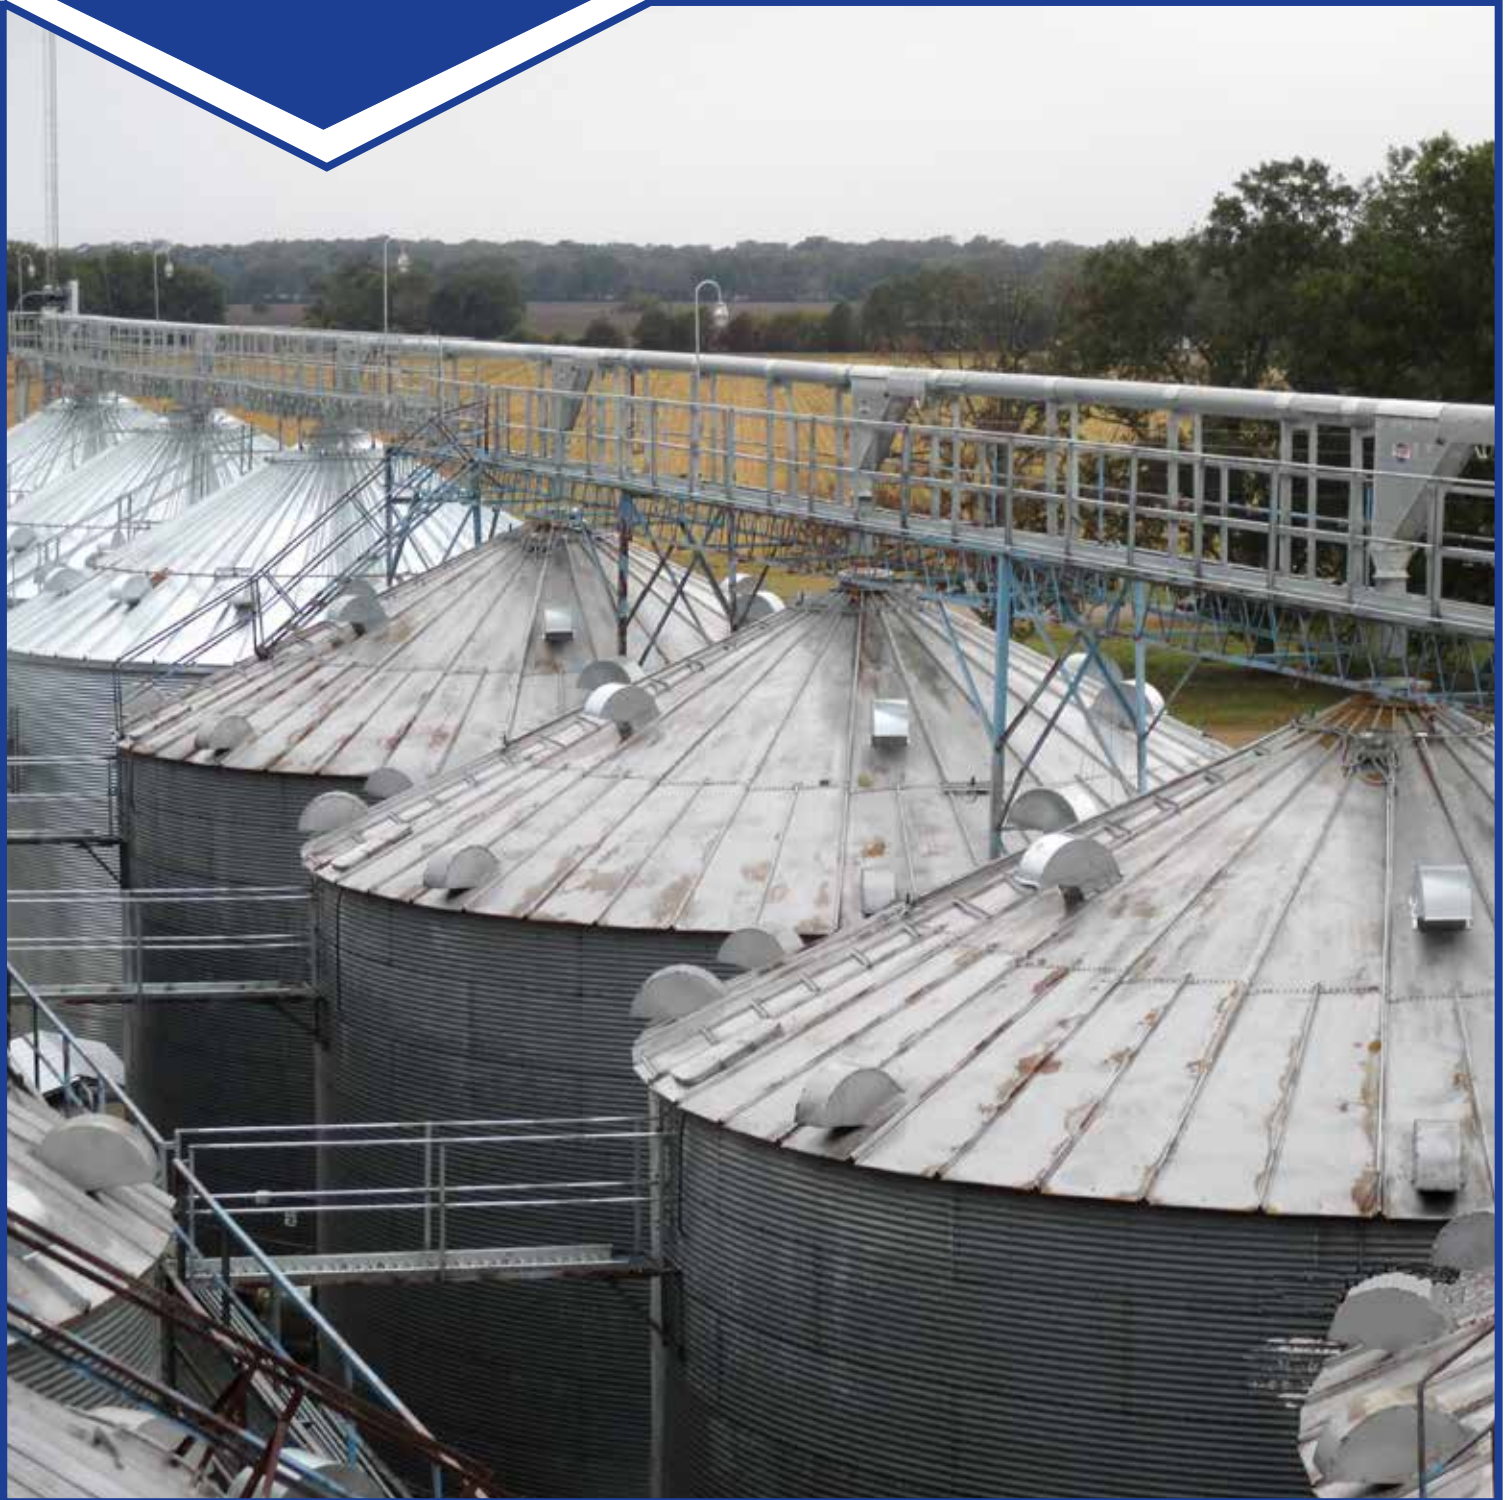

**GGR - CHAIN LOOP SYSTEMS**

# **CREAMER**

**METAL PRODUCTS**

*Your Start to Finish Provider of  
Material Handling Solutions  
since 1946*



## ***Standard Features***

- 1,500-18,000 bushels per hour
- 6"-16" spout construction
- Two-piece split transitions
- Longest discharge opening on the market
- Extra large center wells
- Acme take-ups
- Vertical or leaning applications
- Fill, unload, blend & transfer
- Gentle grain handling
- 70 years grain system design

## ***Optional Features***

- AR liners
- VFD's variable frequency drives
- Soft motor starts
- Inspection sections
- Plug, speed, and bearing sensors
- Support towers
- Catwalks

***BUCKET ELEVATORS  
DISTRIBUTORS  
DRAG CONVEYORS  
SCREW CONVEYORS  
FLOW ACCESSORIES  
AND GRAIN CLEANERS  
ALSO MANUFACTURED  
IN LONDON, OHIO***

***Sales@creamermetal.com • www.creamermetal.com • (800) 362-1603***

Creamer Metal Products has taken the best ideas in grain loop design and combined them to create our GGR conveyor. Each system is able to be custom designed to provide you with the best solutions for material thickness, chain, liners, and horsepower. The GGR conveyor enables you to receive, unload, blend and transfer all of your commodities with one piece of equipment. The chain loop system moves with less damage and horse power than a typical bucket elevator set-up or an air system. A chain loop system can be easily added to any existing straight line bin set-up or is perfect for green site construction. The modular design enables easy expansion to grow as your operation size increases. The reduced maintenance vs augers and traditional material handling set-ups will provide you many seasons of worry free harvests.



## GGR - Grain Loop Specifications

	6" LOOP	8" LOOP	10" LOOP	10" LOOP HD	12" LOOP	12" LOOP HD	16" LOOP HD
<b>Diameter of Tube</b>	6"	8"	10"	10"	12"	12"	16"
<b>Capacity (BPH)</b>	1500	4000	6000	6000	10,000	10,000	18,000
<b>Chain Speed (FPM)</b>	325	325	325	325	400	400	400
<b>Corner Housing</b>	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"
<b>Tube Gauge</b>	12ga	11ga	10ga	10ga	10ga	10ga	10ga
<b>Paddle Thickness</b>	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	5/8"
<b>Corner Shaft Dia.</b>	1-1/2"	2"	3"	3-7/16"	3-7/16"	3-15/16"	4-7/16"
<b>Conveyor Chain</b>	81XHH	81XHH	81XHH	81XHH	81XHH	WH-124	WH-124
<b>Vertical HP per ft.</b>	0.2	0.35	0.5	0.5	0.75	0.75	1.35
<b>Horizontal HP per ft.</b>	0.05	0.08	0.11	0.11	0.18	0.18	0.3
<b>Empty Weight per ft.</b>	11lbs	19.5lbs	23lbs	23lbs	31lbs	37lbs	47lbs
<b>Loaded Weight per ft.</b>	20lbs	35.5lbs	48lbs	48lbs	64lbs	70lbs	135lbs

# ADDITIONAL CREAMER METAL PRODUCTS



## **Galvanized trouble-free bucket elevators**

*Capacities up to  
30,000 bushels per hour.*



## **6" - 18" diameter Distributors**

*to direct the flow of  
materials to your needs.*



## **All the items needed to finish your job.**

*Most items in stock.*

**CREAMER**  
**METAL PRODUCTS**

77 South Madison Road  
London, Ohio 43140-0027

Phone: 740.852.1752 • Fax: 740.852.1797  
Email: sales@creamermetal.com

**[www.creamermetal.com](http://www.creamermetal.com)**